

Gazebo Anchoring Instructions

There are now 4 ground anchors fixed into the concrete in the pits area, these must be used to ensure a secure tie down of the gazebo. The sockets are blanked off with hex headed S/S bolts, washers and rubber seals, please remove the bolts from the sockets and screw in the D anchor points (no need to over tighten them).

Erect the gazebo (4 man job) and position it so that the legs are close to the anchor points. On the long sides, the legs should be outside the anchor points.

Do not bolt through the gazebo feet.

Remember to use the velcro straps around the frame, to hold the cover on.


Using the ratchet straps, diagonally brace the gazebo as shown below on both short sides.

After use please remove the D anchor points and put them back in the hut in the radio box and refit the blanking bolts in the anchor sockets, this will prevent dirt getting in.

Blanking bolts



Strap attachment to top corners of gazebo

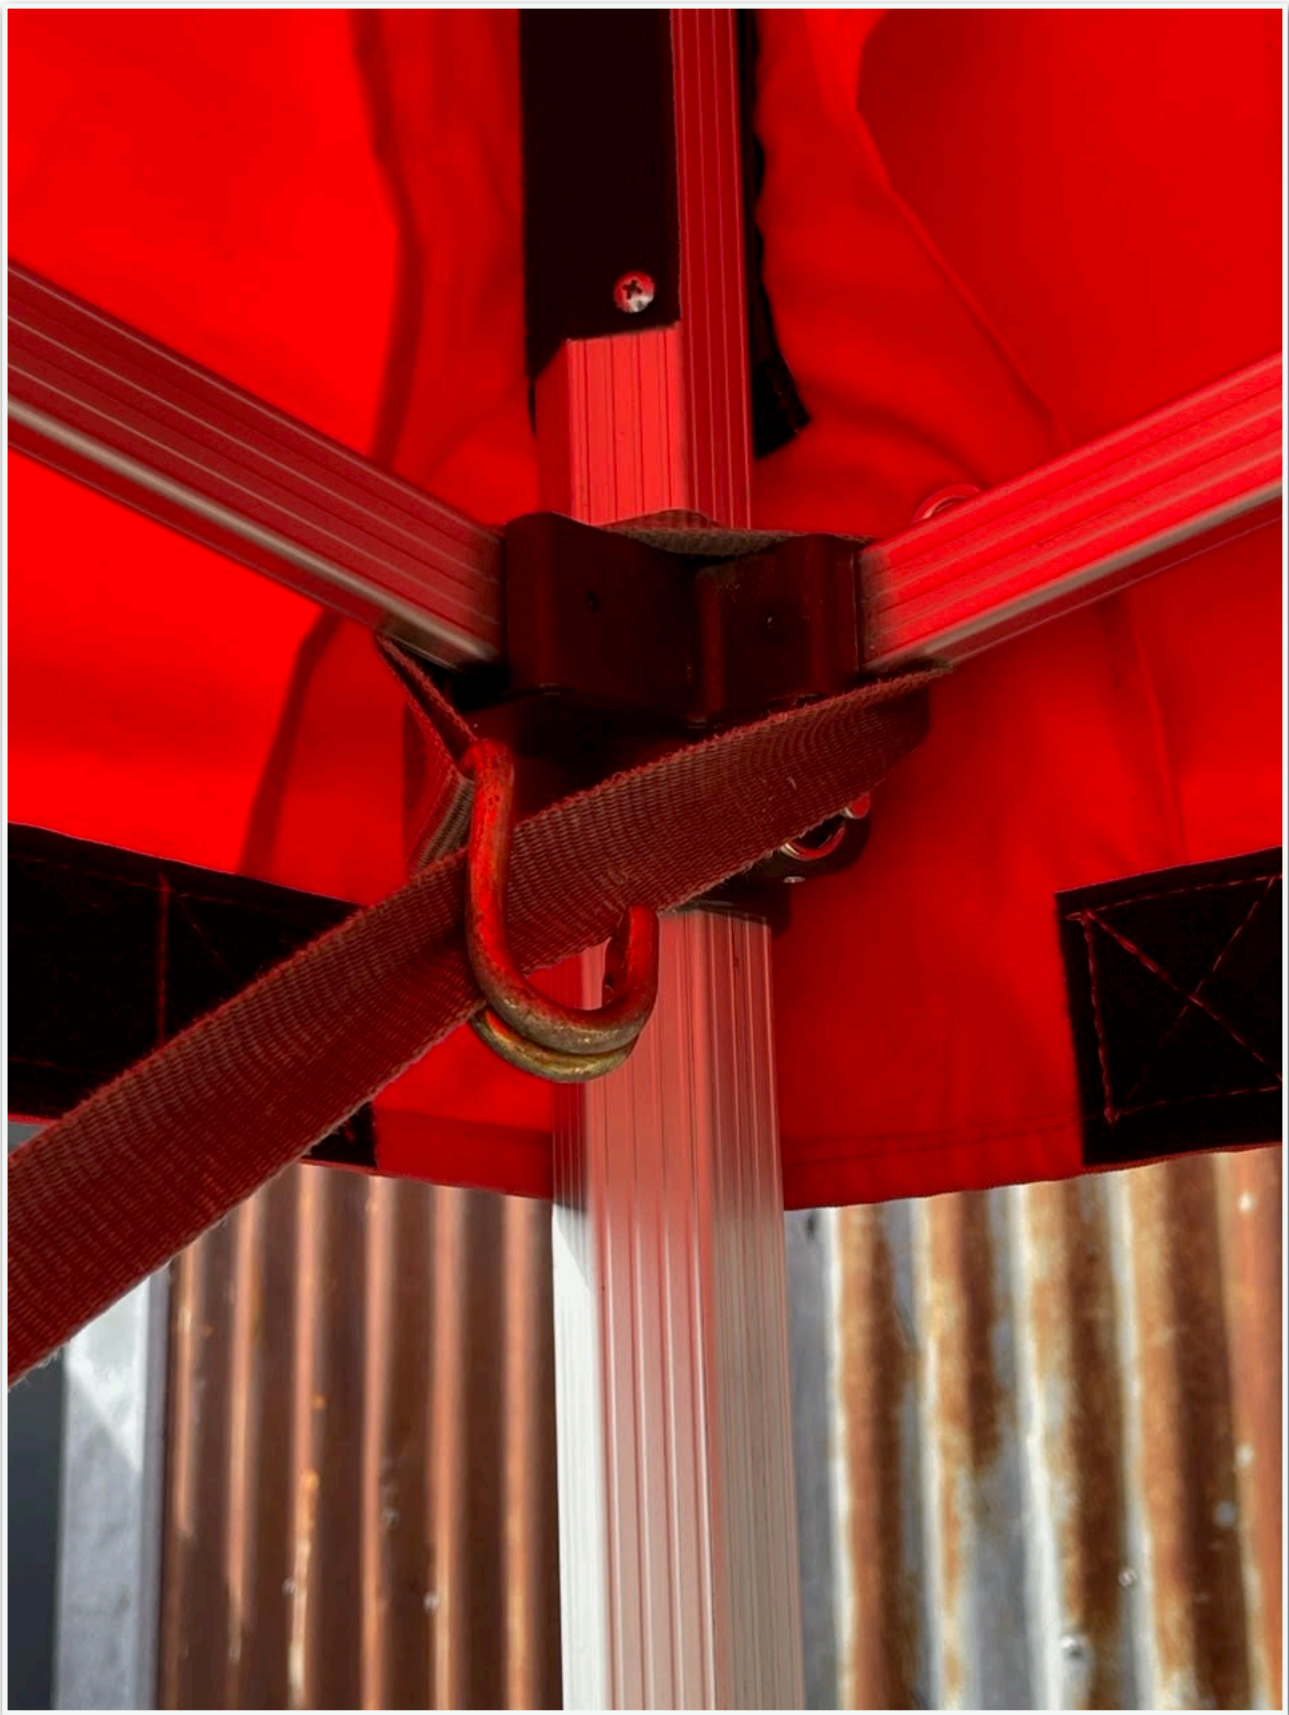

Diagonal bracing on short sides

